

## THE HepvO PRODUCT SELECTOR

HepvO can be installed vertically or horizontally, and is available in 32mm and 40mm diameters.

### HepvO waste valve



Hygienic Self Sealing Waste Valve


32mm BV1A

40mm CV1A

### HepvO and running adaptor

32mm BV3

40mm CV3




Use with the HepvO waste valve when installing in a pipe run

### HepvO with knuckle bend

32mm BV11


40mm CV11




Use with the HepvO valve for horizontal applications

## DIMENSIONS


Fixed vertically or horizontally to fixture outlet.



Fixed on a discharge using a running adaptor.



Fixed horizontally using knuckle bend.

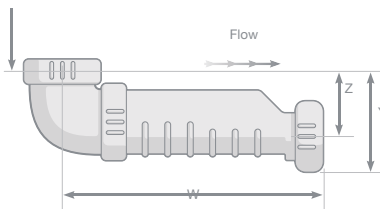

## DIMENSIONS

Size	C	E	L	W	Z	Y
32mm	8	173	215	215	35	68
40mm	6	173	215	215	35	68

### Notes:

- 1 These dimensions are taken from the face of the seal at the base of the female thread in the nut.
- 2 Dimensions are nominal and may vary slightly due to compression of rubber seals.
- 3 It is recommended that HepvO be accessible in all installations.

## END CONNECTIONS

Universal Threaded BS 32 or 40mm.

Universal Compression Outlet 32 or 40mm.

## MATERIAL SPECIFICATIONS

Body Material	Polypropylene
Sealing Mechanism	Various
Sealing Rings	EPDM
Washer	Nylon

## FLOW CAPACITY

(Based on 50mm head of flat-based receptacle)

### Horizontal

BV1A – 40 l/m

CV1A – 50 l/m

### Vertical

BV1A – 60 l/m

CV1A – 70 l/m

## TEMPERATURE CONSIDERATIONS

Maximum operating temperature 75°C.

Based on HepvO having been tested for over 10,000 cycles.